


SPECIAL SERVICE PUMP

PUMP MODEL **SSP**

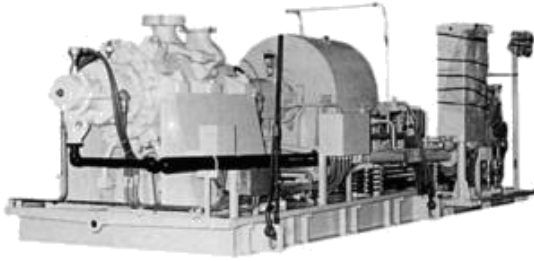

Design Centerline support, Ring section
Multistage, Diffuser type casing
Opposed impeller arrangement

Application Carbamate feed

SS,SSD

SSP

Rating

Capacity	upto 200 m ³ /h (880 U.S. gpm)
Head	upto 2100 m (6890 ft)
Temperature	as Required
Flange Rating	upto ASME Class 2500 lb Others are also available